



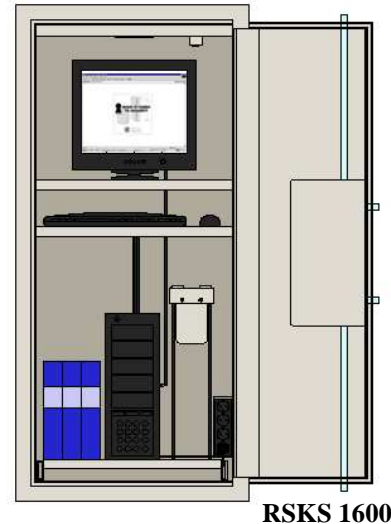

SERVER CABINET SS3492 ROBUR RSKS

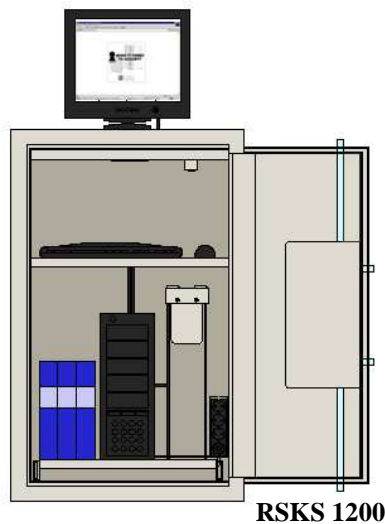

Burglary protection

Robur Server Cabinets are tested and approved in accordance with the Swedish standard SS 3492.


Description

The body is a solid welded construction in 4 mm cold rolled steel. The door is in 4 mm steel, securely engaged on all four sides. The hinge side of the door is secured by means of a solid dog bolt independent of the hinges.

Colour

Light grey RAL 9002.

Model	RSKS 1200	RSKS 1600
External dimensions mm		
Height	1200	1600
Width	750	750
Depth (+55 mm for handle)	900	900
Internal dimensions mm		
Height (clear opening)	1070	1470
Width (clear opening)	635	635
Depth	815	815
Weight kilo	240	280
Volume litre	720	960
Approved in accordance with	SS 3492	
Standard hanging	Right	
Standard locking	Changeable key lock type FAS 6890	
Standard fittings	One ventilated adjustable shelf	Two ventilated adjustable shelf
Standard ventilation	Two fans with individual thermostats. Capacity 820m ³ /h	
Option	Extendable shelf for server	

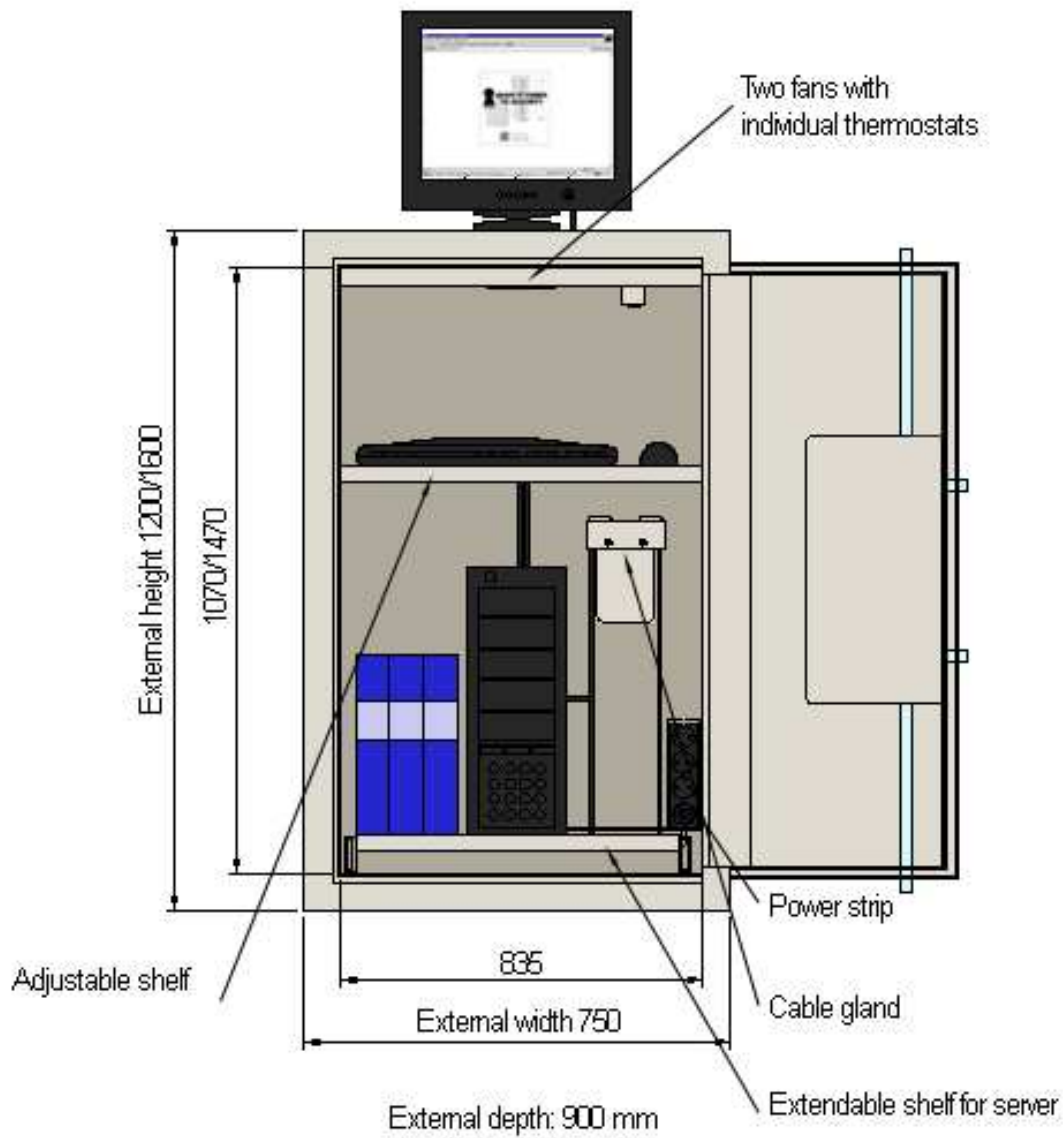

We reserve the right to alter the specification without prior notice.



Head office
Robur Safe AB

Lundbyvägen 8
 SE-311 68 SLÖINGE
 Phone: +46 346 260 260
 Fax: +46 346 260 222
 info@robursafe.com